



PRIME GRADE COLLECTION

Rye Oak

Herringbone · American Oak · Prime grade

PRODUCT CODE

LN184

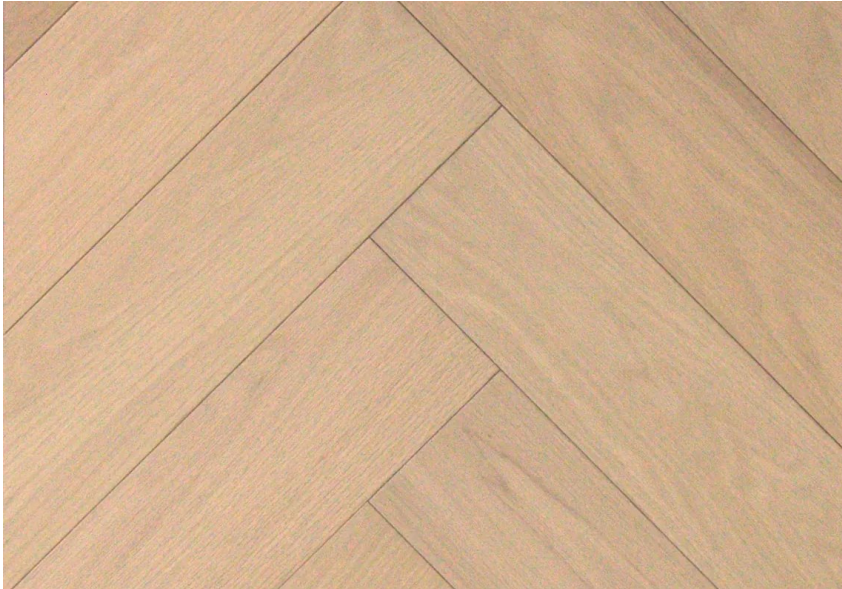


Image for illustration. Oak is a natural material — colour and grain vary from board to board and batch to batch.

WIDTH

125 mm

LENGTH

600 mm

THICKNESS

14 mm · 3 mm wear

GRADE

Prime



Scan to view this floor online and order a free sample.

SPECIFICATION

WOOD SPECIES
American Oak

FINISH
Factory finished

DIMENSIONS
14mm × 125mm × 600mm

CONSTRUCTION
14mm engineered board, 3mm oak wear layer

GRADE
Prime

FORMAT
Herringbone

INSTALLATION
Glue-down

PACK COVERAGE
1.200 m² per pack

UNDERFLOOR HEATING
Suitable (manufacturer guidance applies)

WARRANTY

25-year structural warranty

GRADE & CHARACTER

Our cleanest grade — minimal knots, very few natural marks, consistent colour and grain.

BEFORE FITTING

Store packs flat and unopened in the room where they will be laid, with heating at normal living conditions, for at least 48 hours before fitting. Subfloors must be flat, clean and dry. Blend boards from several packs as you lay.

CARE & MAINTENANCE

Sweep or vacuum regularly and clean with a lightly damp mop and a pH-neutral wood floor cleaner. Avoid steam mops, standing water and abrasive products.

FITTED BY LIGNORA

Supplied throughout the UK and fitted by our own in-house team — the same fitters on every job. Technical certificates are available on request.