



PRIME GRADE COLLECTION

Summer Oak

Herringbone · American Oak · Prime grade

PRODUCT CODE

LNi85

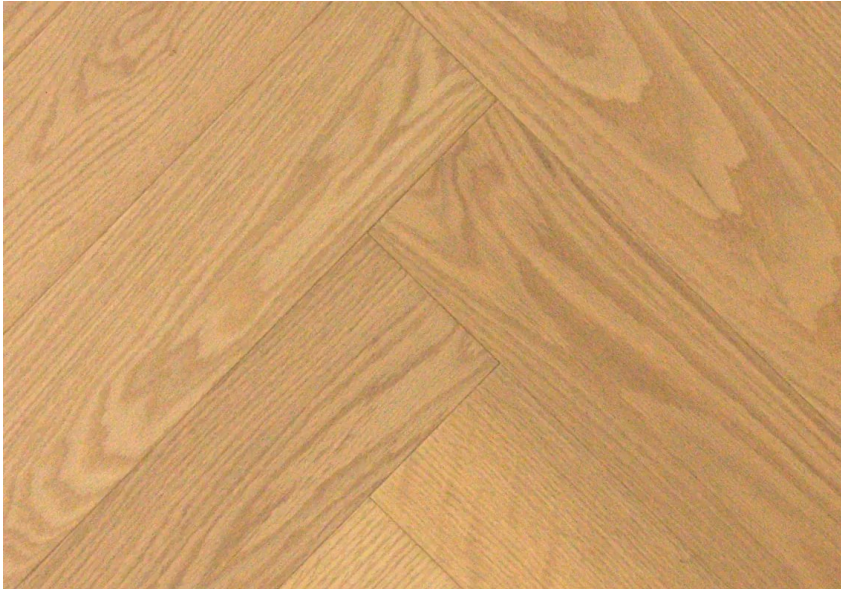


Image for illustration. Oak is a natural material — colour and grain vary from board to board and batch to batch.

WIDTH

125 mm

LENGTH

600 mm

THICKNESS

14 mm · 3 mm wear

GRADE

Prime



Scan to view this floor online and order a free sample.

SPECIFICATION

WOOD SPECIES American Oak	FINISH Factory finished	DIMENSIONS 14mm × 125mm × 600mm
CONSTRUCTION 14mm engineered board, 3mm oak wear layer	GRADE Prime	FORMAT Herringbone
INSTALLATION Glue-down	PACK COVERAGE 1.200 m ² per pack	UNDERFLOOR HEATING Suitable (manufacturer guidance applies)

WARRANTY

25-year structural warranty

GRADE & CHARACTER

Our cleanest grade — minimal knots, very few natural marks, consistent colour and grain.

BEFORE FITTING

Store packs flat and unopened in the room where they will be laid, with heating at normal living conditions, for at least 48 hours before fitting. Subfloors must be flat, clean and dry. Blend boards from several packs as you lay.

CARE & MAINTENANCE

Sweep or vacuum regularly and clean with a lightly damp mop and a pH-neutral wood floor cleaner. Avoid steam mops, standing water and abrasive products.

FITTED BY LIGNORA

Supplied throughout the UK and fitted by our own in-house team — the same fitters on every job. Technical certificates are available on request.